

Registration No:

--	--	--	--	--	--	--	--	--	--

Total Number of Pages: 03

B.Tech  
PEL4104

**4<sup>th</sup> Semester Regular / Back Examination 2017-18  
ELECTRICAL POWER TRANSMISSION & DISTRIBUTION**

BRANCH: EEE

Time: 3 Hours

Max Marks: 100

Q.CODE: C896

Answer Part-A which is compulsory and any four from Part-B.  
The figures in the right hand margin indicate marks.  
Answer all parts of a question at a place.

**Part – A (Answer all the questions)**

Q1

Answer the following questions:

(2 x 10)

- If the length of the line is decreased, its capacitance is .....
- When the regulation is positive, then receiving and voltage ( $V_R$ ) is ..... than sending and voltage ( $V_S$ ).
- The dimensions of constants  $B$  and  $C$  are respectively ..... and .....
- A metallic sheath is provided over the insulation to protect the cable from .....
- The main consideration in the design of a feeder is the .....
- The power factor of an a.c. circuit is given by ..... power divided by ..... power.
- If sag in an overhead line increases, tension in the line .....
- Suspension type insulators are used for voltages beyond .....
- If capacitance between two conductors of a 3-phase line is 4 microFarad, then capacitance of each conductor to neutral is .....
- ..... and ..... are examples of dynamic and static compensator respectively.

Q2

Answer the following questions: **Short answer type**

(2 x 10)

- Define terms : feeder, distributor and service mains.
- What is derating of transmission lines?
- Draw the phasor diagram of medium transmission line (end condenser method).
- Why we need per unit system in case of analysis of transmission system?
- What is proximity effect?
- How 3 wire transmission system is converted to 4 wire distribution system?
- What will happen when power factor is leading in distribution of power?
- What is a ring distributor? State any two advantages of ring main system.
- What do you mean by step voltage and touch voltage?
- What do you understand by VAR compensation? Why it is required?

**Part – B (Answer any four questions)**

Q3

- Differentiate between bundled conductor and composite conductors. Derive (10)


Inductance of a 3-phase overhead line with unsymmetrical spacing and show how transposition helps in overcoming the demerits.

- b) Calculate the inductance per phase per metre for a three-phase double-circuit line whose phase conductors have a radius of 5.3 cm with the horizontal conductor arrangement as shown in Figure shown below. (5)



- Q4 a) Draw the equivalent circuit and phasor diagram of transmission line (end condenser method). Hence derive the ABCD parameters of the above. Also check the condition of symmetry and reciprocity. (10)

- b) Derive the capacitance of a single phase (see figure) line considering the effect of earth. (5)

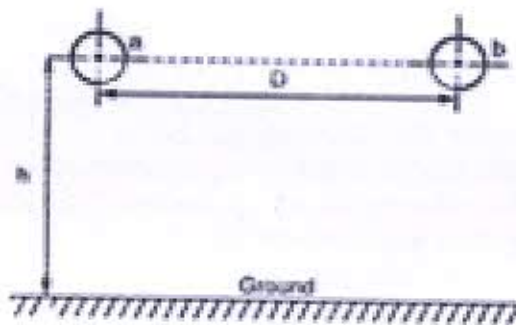

- Q5 a) An overhead transmission line conductor having a parabolic configuration weighs 1.925 kg per metre of length. The area of X-section of the conductor is 2.2 cm<sup>2</sup> and the ultimate strength is 8000 kg/cm<sup>2</sup>. The supports are 600 m apart having 15 m difference of levels. Calculate the sag from the taller of the two supports which must be allowed so that the factor of safety shall be 5. Assume that ice load is 1 kg per metre run and there is no wind pressure. (10)

- b) What do you mean by sag? Derive the expression for sag when the supports are at unequal levels. (5)

- Q6 a) What do you mean by string efficiency? Derive the mathematical expression for string efficiency for a string three insulators. Discuss different methods of improving string efficiency. (10)

- b) Each conductor of a 3-phase high-voltage transmission line is suspended by a string of 4 suspension type disc insulators. If the potential difference across the second unit from top is 13.2 kV and across the third from top is 18 kV, determine the voltage between conductors. Find the string sufficiency. (5)

- Q7 a) Two conductors of a d.c. distributor cable AB 1000 m long have a total resistance of 0.1 Ω. The ends A and B are fed at 240 V. The cable is uniformly loaded at 0.5 A per metre length and has concentrated loads of 120 A, 60 A, 100 A and 40 A at points distant 200 m, 400 m, 700 m and 900 m respectively from the end A. Calculate (i) the point of minimum potential (ii) currents supplied from ends A and B (iii) the value of minimum potential. (10)

- b) With neat diagram compare AC and DC distribution systems. Discuss their merits and demerits. (5)

- Q8 a) A 3-phase, 50 Hz transmission line 100 km long delivers 20 MW at 0.9 p.f. lagging and at 110 kV. The resistance and reactance of the line per phase per (10)

km are  $0.2 \Omega$  and  $0.4 \Omega$  respectively, while capacitance admittance is  $2.5 \times 10^{-6}$  siemen/km/phase. Calculate: (i) the current and voltage at the sending end (ii) efficiency of transmission. Use nominal T method.

- b) With neat diagram explain Kelvin's law for conductor size. What are its limitations? (5)

- Q9 a) A d.c. ring main ABCDA is fed from point A from a 250 V supply and the resistances (including both lead and return) of various sections are as follows:  $AB = 0.02 \Omega$ ;  $BC = 0.018 \Omega$ ;  $CD = 0.025 \Omega$  and  $DA = 0.02 \Omega$ . The main supplies loads of 150 A at B; 300 A at C and 250 A at D. Determine the voltage at each load point. If the points A and C are linked through an interconnector of resistance  $0.02 \Omega$ , determine the new voltage at each load point. (10)
- b) What are the advantages and disadvantages of underground cables? What do you mean by grading of cables? Explain different methods of grading of cables. (5)

Registration No :

--	--	--	--	--	--	--	--	--	--

Total Number of Pages : 02

B.Tech  
PEE4I104

4<sup>th</sup> Semester Regular / Back Examination 2018-19  
ELECTRICAL POWER TRANSMISSION & DISTRIBUTION  
BRANCH : ELECTRICAL

Max Marks : 100

Time : 3 Hours

Q.CODE : F683

Answer Question No.1 (Part-1) which is compulsory, any eight from Part-II and any two from Part-III.

The figures in the right hand margin indicate marks.

Part- I

Q1 Only Short Answer Type Questions (Answer All-10)

(2 x 10)

- What is per unit system?
- Resistance in AC is more than DC Justify.
- Why the transmission line is transposed?
- What is stringing chart?
- Draw the Phasor diagram for nominal- $\pi$  network of medium transmission line.
- How to reduce the conductor vibration?
- What is Proximity effect?
- State the factors affecting sag?
- What are the types of poles used in transmission and distribution system?
- What factors decide the rise in temperature in underground cable?

Part- II

Q2 Only Focused-Short Answer Type Questions- (Answer Any Eight out of Twelve)

(6 x 8)


- Derive the expression for capacitance of a 3-phase overhead line with unsymmetrical spacing.
- Derive the power flow through transmission line.
- Discuss the testing of insulators?
- Explain voltage regulation of transmission line? Deduce an expression for voltage regulation of a short transmission line.
- What is string efficiency? Explain the methods of improving string efficiency.
- Explain reactive compensations of a Transmission line?
- State and explain kelvin's law. Illustrate the limitations.
- Calculate the string efficiency and voltage of the conductor of a 3-phase transmission line is being supported by three disc insulators. The Potential across top unit (i.e., near to the tower) and middle unit are 8 kV and 11 kV respectively.
- Compare various distribution systems.
- Classify three phase underground cables? Discuss various methods of grading of cables.
- Distinguish touch and step potential and explain the use of grounding.
- The insulation resistance of a single-core cable is 495 M $\Omega$  per km. If the core diameter is 2.5 cm and resistivity of insulation is  $4.5 \times 10^{14}$   $\Omega$ -cm, find the insulation thickness.

Part-III

Only Long Answer Type Questions (Answer Any Two out of Four)


Q3 Classify overhead transmission line according to its performance and derive the A,B,C,D constant of long transmission line. (16)

Q4 Find the expression for flux linkages due to a single current carrying conductor and evaluate the inductance per phase per km of a double circuit 3 phase line as shown in the fig. The conductors are transposed and are of radius 0.75 cm each. Where a,b& c are go conductor and corresponding a',b' and c' are return conductor for corresponding a,b and c Phase. (16)

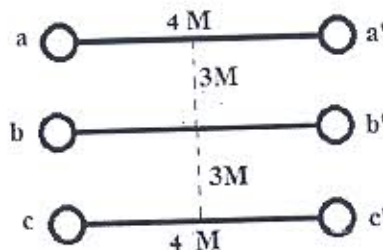

Q5 Describe the different types of D.C distributors. A 2-wire D.C distributor AB is fed from both ends. At the feeding point A the voltage is maintained at 240 V and at B is 245 V. The total length of the distributor is 200 meters and loads are tapped off as under: 25A at 50 meters from A; 50A at 75 meters from A; 30A at 100 meters from A and 40A at 150 meters from A. If the resistance per Km of one conductor is  $0.3\Omega$ , calculate: (16)

- The currents in the various sections of the distributor
- The minimum voltage and the point at which it occurs.
- The power dissipated in the distributor

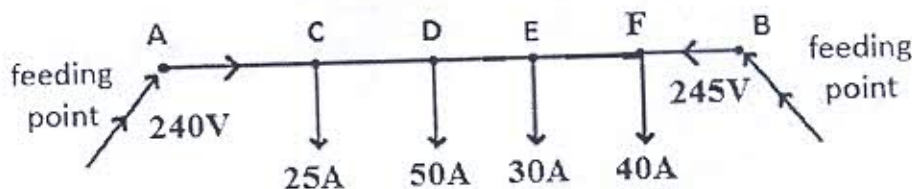

Q6 Derive the equation of sag when supports are at equal levels and discuss the effect of ice loading and wind pressure on sag. (16)